

WAAS CH 56523 W12A	APP CRS 118°	Rwy Idg TDZE Apt Elev	4400 3294 3298
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 12

CHADRON MUNI (CDR)

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¼ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 5900 direct
ECOPO and hold.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
-----------------------	--------------------------------------	---------------------------------

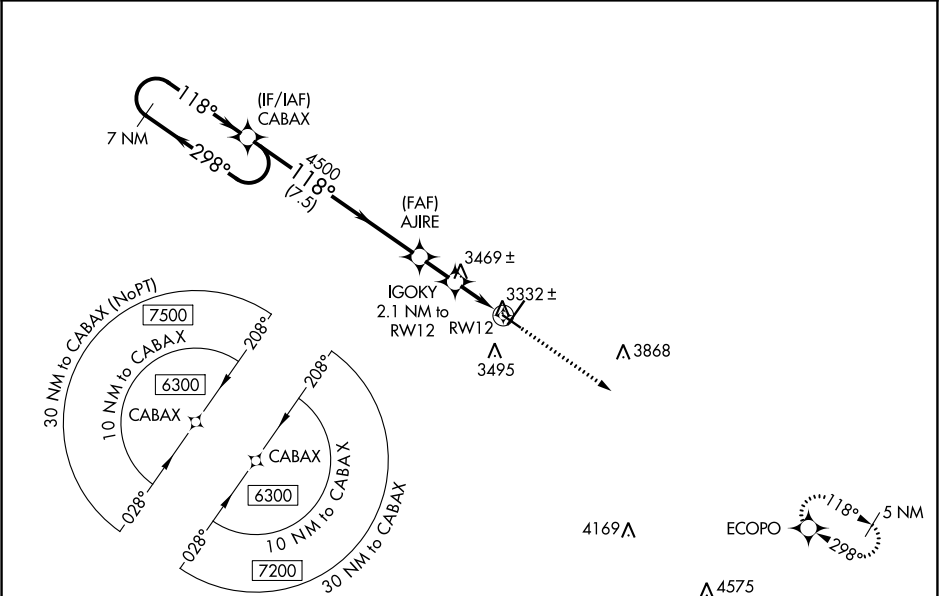

5017△ 4700±△					ELEV 3298 D TDZE 3294
7 NM Holding Pattern VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).					5900 ECOPO
6300 ← 298° 118° → 4500					*LNAV only
GP 3.00° TCH 42					RW12
7.5 NM 1.6 NM 2.1 NM					
CATEGORY	A	B	C	D	
LPV DA	3544-1		250 (300-1)	NA	
LNAV/VNAV DA	3719-1½		425 (500-1½)	NA	
LNAV MDA	3720-1	426 (500-1)	3720-1¼ 426 (500-1¼)	NA	
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¾ 622 (700-1¾)	NA	

HIRL Rwy 3-21 0

MIRL Rwy 12-30 0

REIL Rwy 21 and 30 0