

APP CRS
133°

Rwy Idg
TDZE
Apt Elev

8310
478
487

RNAV (RNP) X RWY 13R


DALLAS LOVE FLD (DAL)

▼

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS 120.15	REGIONAL APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CLNC DEL 127.9	CPDLC
------------------	---	---------------------------	-------------------------	-------------------	-------

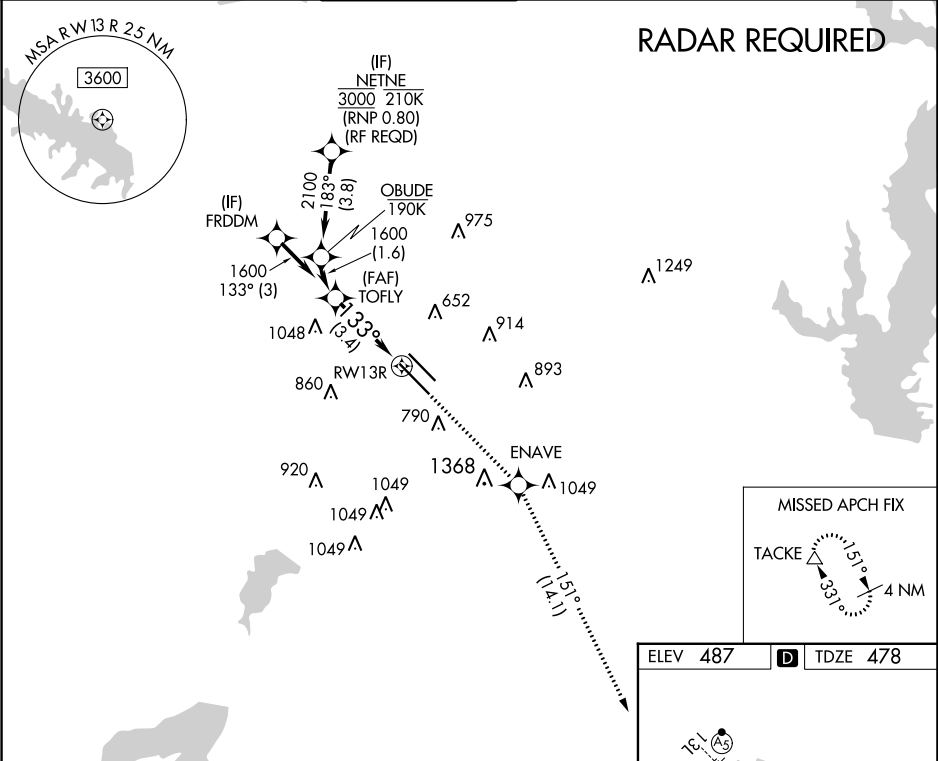

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

3000

ENAVE

tr 151°

TACKE

TOFLY

1600

1600

133°

RWY 13R

See planview for multiple IF locations.

GP 3.00°

TCH 48

3.4 NM

CATEGORY	A	B	C	D
RNP 0.20 DA		781/50	303 (300-1)	
RNP 0.25 DA		833/60	355 (400-1¼)	
RNP 0.30 DA		929-1½	451 (500-1½)	

AUTHORIZATION REQUIRED

TDZ/CL Rwy 13L and 31L
HIRL Rwy 13L-31R, and 13R-31L