

WAAS
CH **70426**
W33A

APP CRS
329°

Rwy Idg
TDZE **336**
Apt Elev **336**

RNAV (GPS) RWY 33
WARRENTON/FAUQUIER (HWY)

▼


⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Culpeper altimeter setting; increase all MDA 40 feet, increase LP Cat C/D visibility ½ SM, increase LNAV Cat C/D and Circling Cat D visibility ¼ SM.


MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct CSN VORTAC and hold, continue climb in hold to 3000.

AWOS-3 120.35	CJR AWOS-3 119.325	POTOMAC APP CON 128.525 306.925	UNICOM 122.7 (CTAF) 0
-------------------------	------------------------------	---	---------------------------------

RADAR REQUIRED

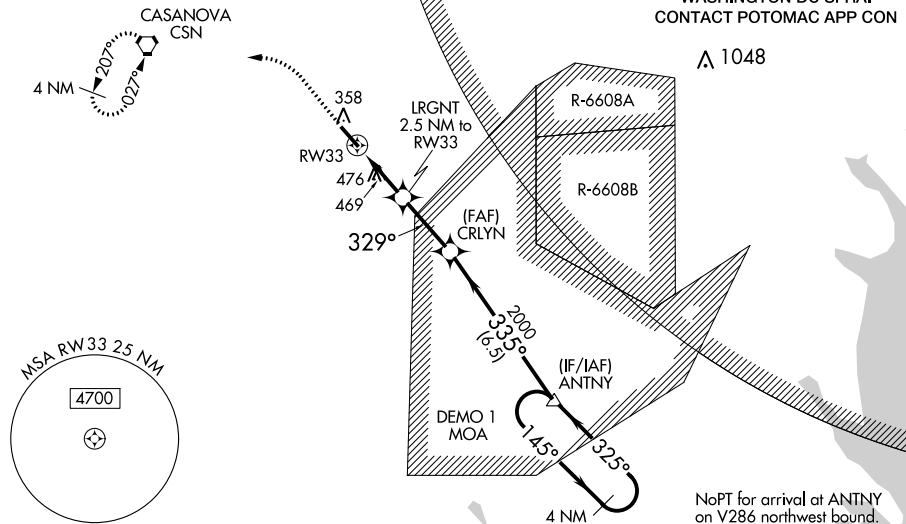

ELEV 336	TDZE 336
-----------------	-----------------



Procedure NA when DEMO 1 MOA active.

800

3000

CSN

4 NM Holding Pattern

LRGNT 2.5 NM to RW33

1.1 NM to RW33

1.4 NM

2.6 NM

6.5 NM

CRLYN

ANTNY

329°

335°

145°

325°

2000

1160

3.00° TCH 45

CATEGORY	A	B	C	D
LP MDA	720-1 384 (400-1)		720-1½ 384 (400-1½)	
LNAV MDA	740-1 404 (500-1)		740-1½ 404 (500-1½)	
CIRCLING	760-1 424 (500-1)	800-1 464 (500-1)	880-1½ 544 (600-1½)	980-2 644 (700-2)