



LOC I-ILE	APP CRS	Rwy Idg	<b>4641</b>
<b>108.3</b>	<b>012°</b>	TDZE	<b>843</b>
		Apt Elev	<b>848</b>

# LOC RWY 1


SKYLARK FIELD (I,LE)

ADF required.		MISSED APPROACH: Climb to 1500 then climbing right turn to 3100 direct IRESH LOM and hold, continue climb-in-hold to 3100.
▼ ▲ NA	Circling Rwy 19 NA at night.	

AWOS-3PT <b>128.575</b>	GRAY APP CON <b>120.075 323.15</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.7 (CTAF) 0</b>
----------------------------	---------------------------------------	--------------------------	---------------------------------

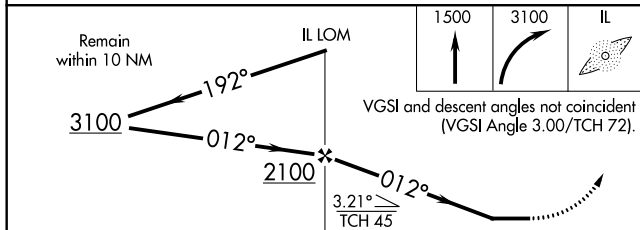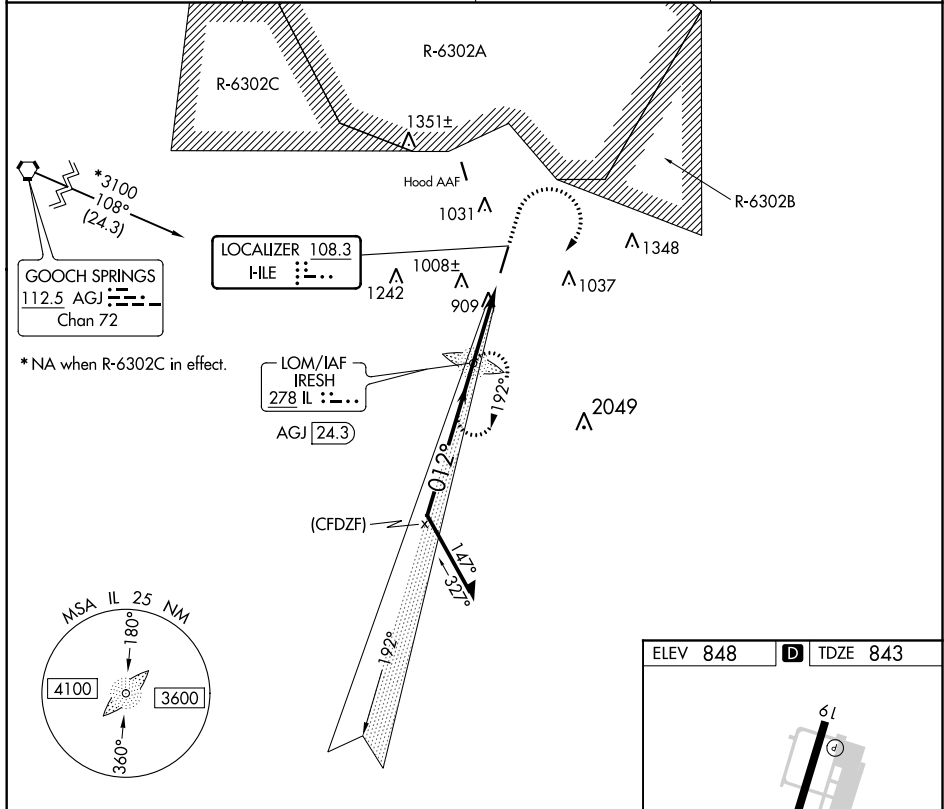

CATEGORY	A	B	C	D
S-1	1160-1	317 (400-1)		NA
<b>C</b> CIRCLING	1300-1 452 (500-1)	1340-1 492 (500-1)	1440-1½ 592 (600-1½)	NA

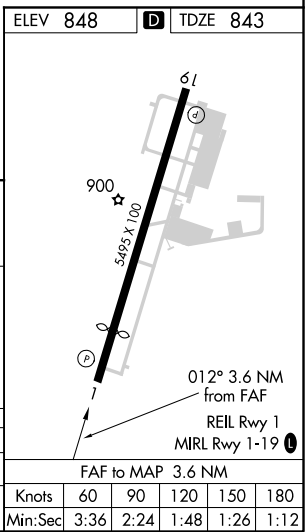

WAAS CH <b>50239</b> <b>W01A</b>	APP CRS <b>012°</b>	Rwy Idg TDZE Apt Elev	<b>4651</b> <b>844</b> <b>848</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 1

SKYLARK FIELD (I.L.E.)

▼  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 19 NA at night.

MISSED APPROACH: Climb to 1300 then Climbing right turn to 3100 direct IZSUN and hold.



AWOS-3PT <b>128.575</b>	GRAY APP CON <b>120.075 323.15</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.7 (CTAF)</b>
----------------------------	---------------------------------------	--------------------------	-------------------------------

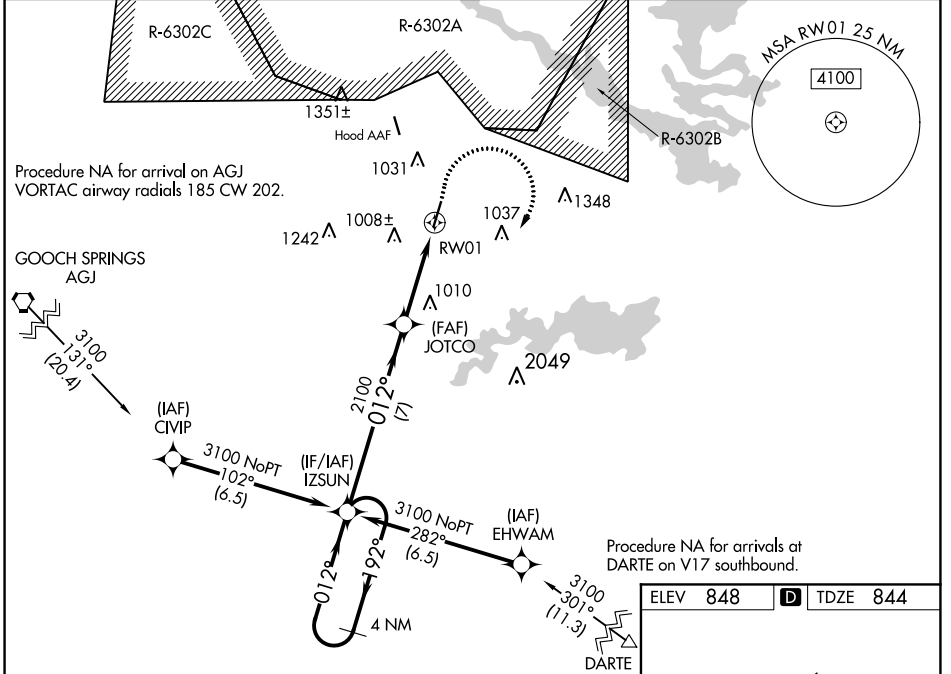

SC-3, 03 DEC 2020 to 31 DEC 2020

SC-3, 03 DEC 2020 to 31 DEC 2020

ELEV <b>848</b>		TDZE <b>844</b>
-----------------	--	-----------------

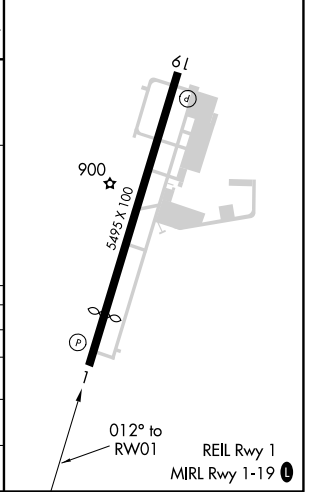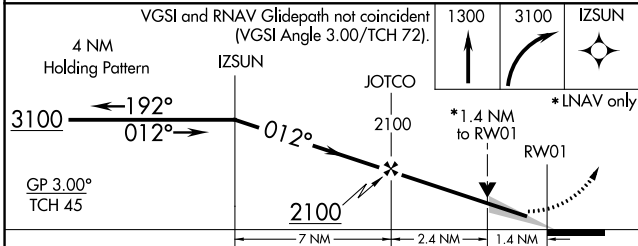

CATEGORY	A	B	C	D
LPV DA	1044-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	1608-3	764 (800-3)		NA
LNAV MDA	1360-1	516 (600-1)	1360-1 3/8 516 (600-1 3/8)	NA
CIRCLING	1360-1	512 (500-1)	1440-1 1/2 592 (600-1 1/2)	NA



VOR/DME GRK <b>111.8</b> Chan <b>55</b>	APP CRS <b>057°</b>	Rwy Idg TDZE Apt Elev <b>N/A</b> <b>N/A</b> <b>848</b>
---	------------------------	--

**VOR-A**  
SKYLARK FIELD (IL.E)

**NA** Circling Rwy 19 NA at night.  
When local altimeter setting not received, use Robert Gray AAF allimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climbing right turn to 3000 direct GRK VOR/DME and hold.

AWOS-3PT <b>128.575</b>	GRAY APP CON <b>120.075 323.15</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.7</b> (CTAF) <b>D</b>
----------------------------	---------------------------------------	--------------------------	--

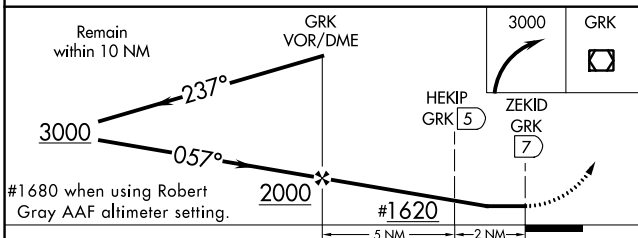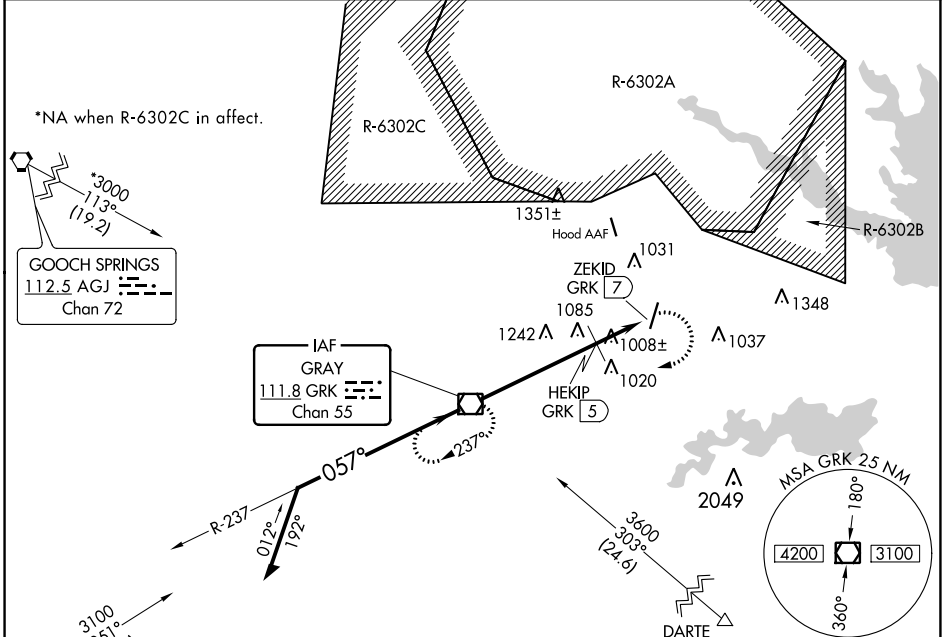

ELEV 848 **D**

REIL Rwy 1

MRL Rwy 1-19 **D**

FAF to MAP 7 NM

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

CATEGORY	A	B	C	D
<b>C</b> CIRCLING	1620-1 772 (800-1)	1620-1¼ 772 (800-1¼)	1620-2¼ 772 (800-2¼)	NA
HEKIP FIX MINIMUMS (DME REQUIRED)				
<b>C</b> CIRCLING	1320-1 472 (500-1)	1360-1 512 (600-1)	1440-1½ 592 (600-1½)	NA

SC-3, 03 DEC 2020 to 31 DEC 2020

SC-3, 03 DEC 2020 to 31 DEC 2020