

| | | |
|---|------------------------|---|
| LOC/DME I-PQL 110.1 Chan 38 | APP CRS 168° | Rwy Idg 6500 TDZE 17 Apt Elev 17 |
|---|------------------------|---|





ILS or LOC RWY 17

TRENT LOTT INTL (PQL)

When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase DA to 292 feet; increase all MDA 80 feet and S-LOC 17 visibility Cat B ¼ mile, and Cats C and D ½ mile, increase Circling visibility Cats B and C ¼ mile. OTIME Fix Minimums, increase S-LOC 17 visibility Cats C and D ½ mile and Circling Cats C and D ½ mile. For inop MALSRS when using Mobile Rgnl altimeter setting increase S-ILS all Cats visibility to ¾ mile.

MALSRS MISSED APPROACH: Climb to 900 then climbing left turn to 2000 direct SJI VORTAC and hold.

| | | | | | |
|------------------------|---------------------------------------|--|---------------------------|----------------------------|------------------------|
| ATIS 135.175 | MOBILE APP CON★ 121.0 307.1 | TRENT LOTT TOWER★ 118.575 (CTAF) | GND CON 121.725 | CLNC DEL 121.725 | UNICOM 122.8 |
|------------------------|---------------------------------------|--|---------------------------|----------------------------|------------------------|

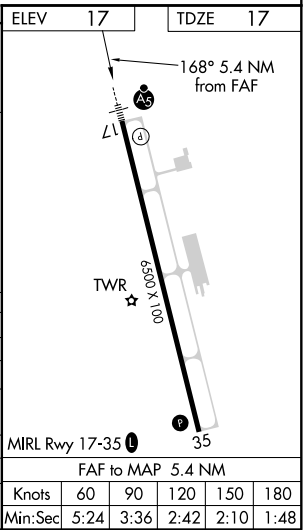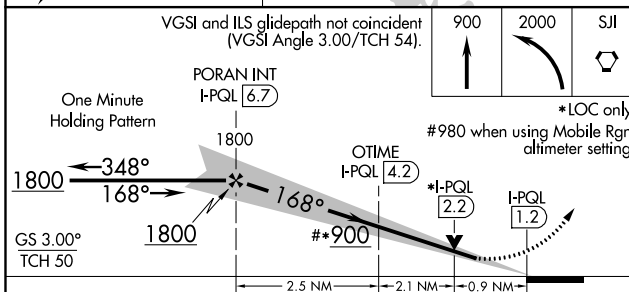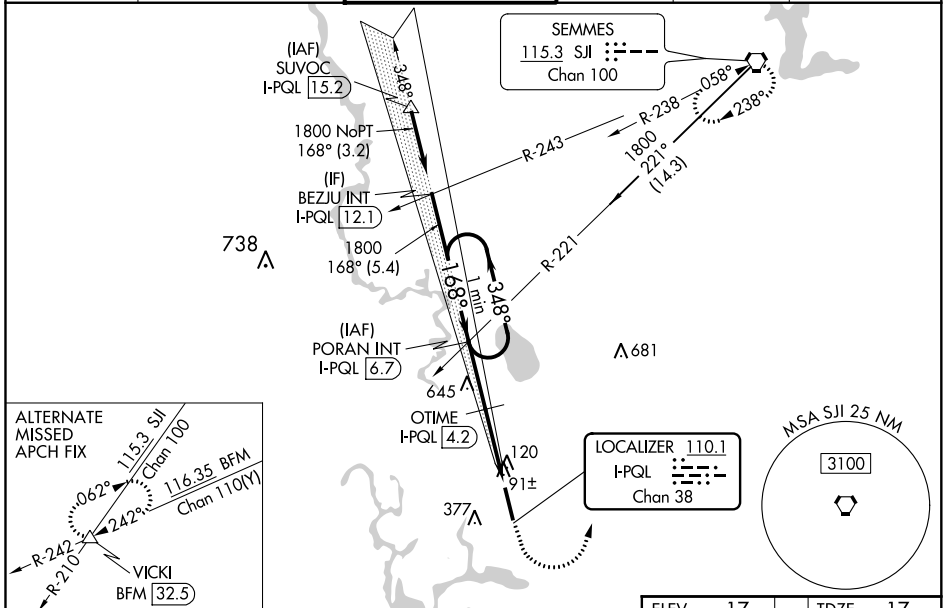

| CATEGORY | A | B | C | D |
|--------------------|---------------------|-------------------|---------------------|-------------------|
| S-ILS 17 | 217-½ 200 (200-½) | | | |
| S-LOC 17 | 900-¾ 883 (900-¾) | | 900-2 883 (900-2) | |
| CIRCLING | 900-1¼ 883 (900-1¼) | | 900-2¾ 883 (900-2¾) | 900-3 883 (900-3) |
| OTIME FIX MINIMUMS | | | | |
| S-LOC 17 | 360-½ 343 (400-½) | | 360-¾ 343 (400-¾) | |
| CIRCLING | 480-1 463 (500-1) | 680-1 663 (700-1) | 680-1¾ 663 (700-1¾) | 680-2 663 (700-2) |

SC-4, 16 JUN 2022 to 14 JUL 2022

SC-4, 16 JUN 2022 to 14 JUL 2022


| | | |
|--|------------------------|---|
| WAAS CH 58204 W17A | APP CRS 168° | Rwy Idg 6500 TDZE 17 Apt Elev 17 |
|--|------------------------|---|

RNAV (GPS) RWY 17

TRENT LOTT INTL (PQL)




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting: increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet. Increase LNAV/VNAV visibility 1/8 mile all Cats; increase all MDA 80 feet and LNAV Cat C/D visibility 1/4 mile and Circling Cat C/D visibility 1/2 mile. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop MALSRS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to 3/8 mile.

MALSRS



MISSED APPROACH:
Climb to 800 then climbing left turn to 1800 direct BEZJU and hold.

| | | | | | |
|------------------------|--|---|---------------------------|----------------------------|------------------------|
| ATIS 135.175 | MOBILE APP CON ★ 121.0 307.1 | TRENT LOTT TOWER ★ 118.575 (CTAF) 0 | GND CON 121.725 | CLNC DEL 121.725 | UNICOM 122.8 |
|------------------------|--|---|---------------------------|----------------------------|------------------------|

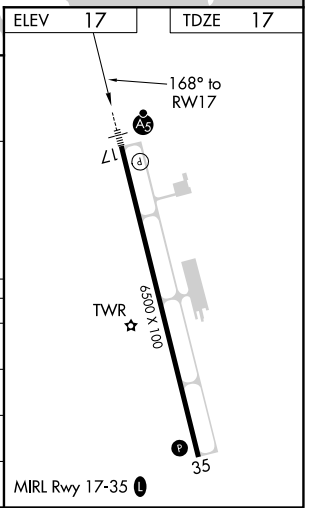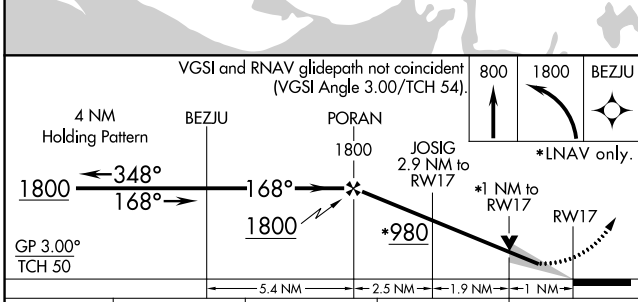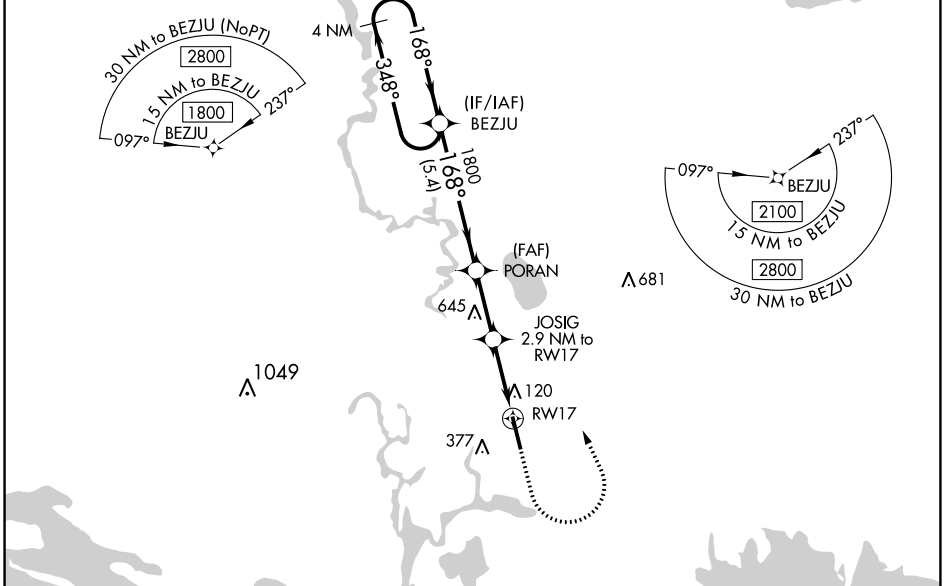

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------------|----------------------|
| LPV DA | 217-1/2 | | 200 (200-1/2) | |
| LNAV/VNAV DA | 282-1/2 | | 265 (300-1/2) | |
| LNAV MDA | 380-1/2 | 363 (400-1/2) | 380-5/8 | 363 (400-5/8) |
| CIRCLING | 480-1 463 (500-1) | 680-1 663 (700-1) | 680-1 3/4 663 (700-1 3/4) | 680-2 663 (700-2) |

SC-4, 16 JUN 2022 to 14 JUL 2022

SC-4, 16 JUN 2022 to 14 JUL 2022

| | | |
|--|------------------------|---|
| WAAS CH 72904 W35A | APP CRS 348° | Rwy Idg 6500 TDZE 17 Apt Elev 17 |
|--|------------------------|---|


RNAV (GPS) RWY 35

TRENT LOTT INTL (PQL)



Baro-VNAV NA when using Mobile Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase LPV DA to 342 feet, LNAV/VNAV DA to 422 feet, and all MDA 80 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats. Increase LNAV visibility C/D ½ mile and Circling visibility Cts C/D ½ mile.

MISSED APPROACH: Climb to 1800 direct BEZJU and hold.

| | | | | | |
|------------------------|--|---|---------------------------|----------------------------|------------------------|
| ATIS 135.175 | MOBILE APP CON ★ 121.0 307.1 | TRENT LOTT TOWER ★ 118.575 (CTAF) | GND CON 121.725 | CLNC DEL 121.725 | UNICOM 122.8 |
|------------------------|--|---|---------------------------|----------------------------|------------------------|

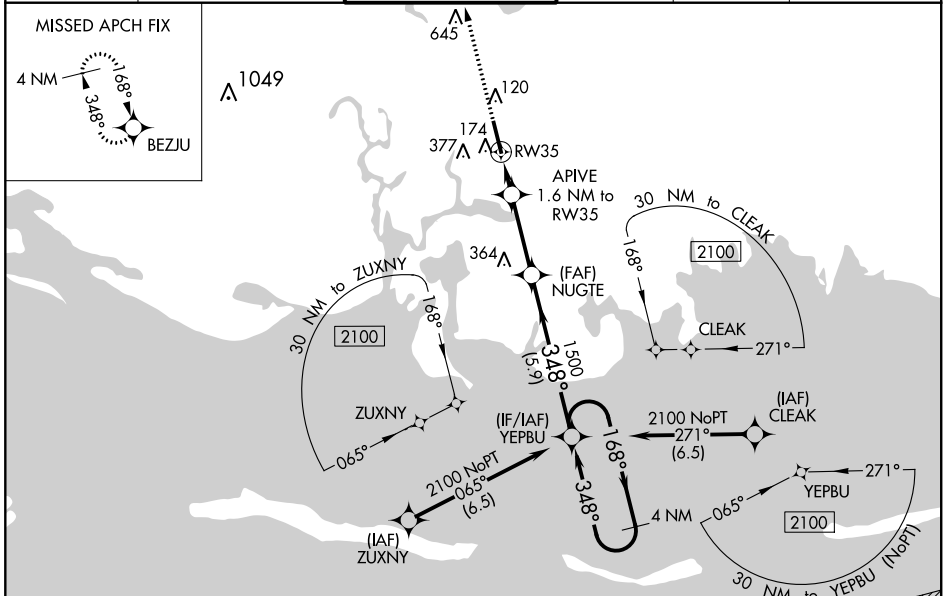

| | |
|---------|---------|
| ELEV 17 | TDZE 17 |
|---------|---------|

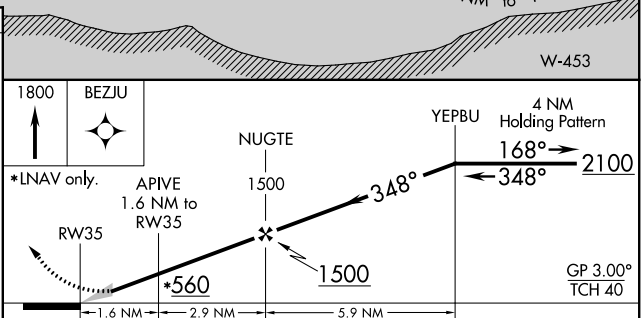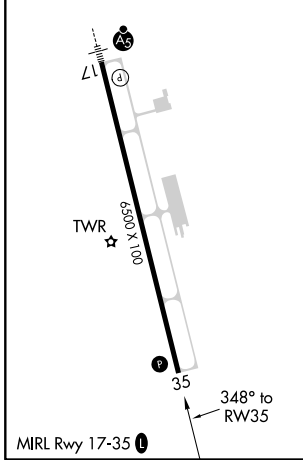

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------------|----------------------|
| LPV DA | | 267-7/8 | 250 (300-7/8) | |
| LNAV/VNAV DA | | 347-1/8 | 330 (400-1/8) | |
| LNAV MDA | 440-1 | 423 (500-1) | 440-1 1/4 | 423 (500-1 1/4) |
| CIRCLING | 480-1 463 (500-1) | 680-1 663 (700-1) | 680-1 3/4 663 (700-1 3/4) | 680-2 663 (700-2) |

SC-4, 16 JUN 2022 to 14 JUL 2022

SC-4, 16 JUN 2022 to 14 JUL 2022