


| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 69203 W24A | APP CRS 238° | Rwy Idg TDZE Apt Elev | 6500 66 67 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) Z RWY 24


DEADHORSE (SCC) (PASC)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5000, and LNAV Cat E visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR 

MISSED APPROACH: Climb to 500 then climbing left turn to 1700 direct MAJEF and hold.



| | | |
|----------------------|--|--|
| AFIS 118.4 | ANCHORAGE CENTER 134.4 370.9 | DEADHORSE RADIO 123.6 (CTAF) 0 |
|----------------------|--|--|

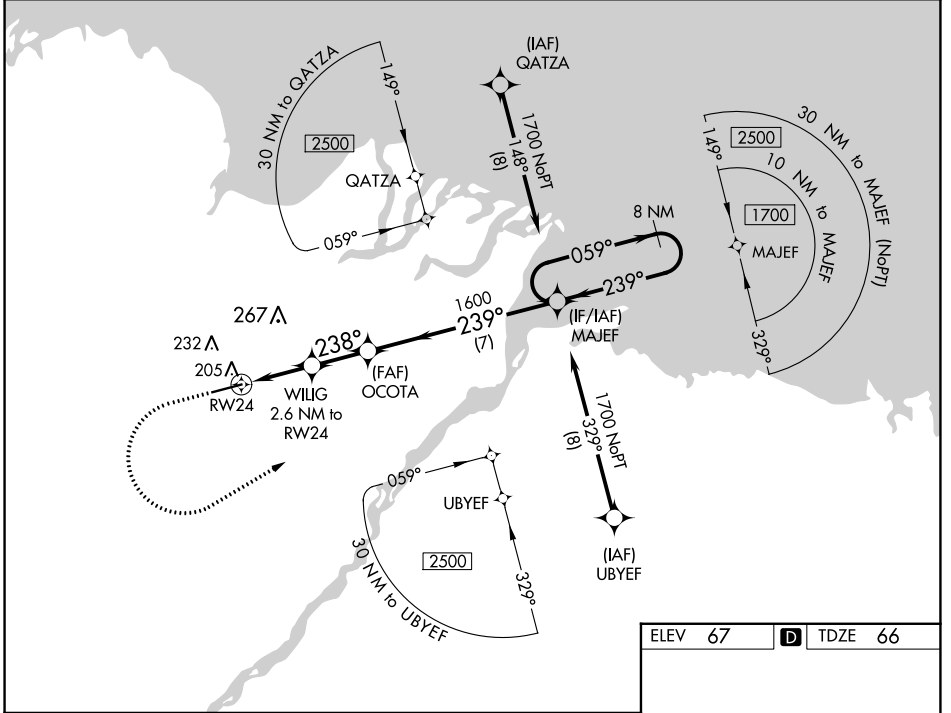

AK, 25 JAN 2024 to 21 MAR 2024

AK, 25 JAN 2024 to 21 MAR 2024

| | |
|---------|------------------|
| ELEV 67 | D TDZE 66 |
|---------|------------------|

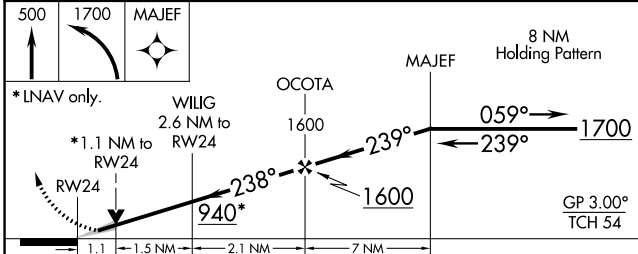

| | | | | | |
|-------------------|--------------------|---|---------------------------------------|---|---|
| CATEGORY | A | B | C | D | E |
| LPV DA# | 266/24 | | 200 (200-½) | | |
| LNAV/VNAV DA | 381/30 | | 315 (400-¾) | | |
| LNAV MDA | 460/24 394 (400-½) | | 460/35 394 (400-¾) | | |
| C CIRCLING | 540-1 473 (500-1) | | 580-1½ 513 (600-1½) 620-2 553 (600-2) | | |

HIRL Rwy 6-24 **0**