

OZARK EIGHT DEPARTURE

AL-360 (FAA)



ST LOUIS LAMBERT INTL (STL)

ST. LOUIS, MISSOURI

NC-3, 22 FEB 2024 to 21 MAR 2024

**TOP ALTITUDE:
(JETS) 5000/(PROPS) 3000**

D-ATIS 125.025 379.925
 CLNC DEL 119.5 363.1
 CPDLC
 GND CON 121.9 348.6 (Inbound)
 121.65 377.175 (Outbound)
 118.925 227.125 (Rwy 11/29)
 ST LOUIS TOWER 120.05 284.6 (Rwys 12L/30R, 24)
 118.5 257.7 (Rwy 12R/30L)
 132.475 239.275 (Rwys 6, 11/29)
 ST. LOUIS DEP CON 128.1 307.05

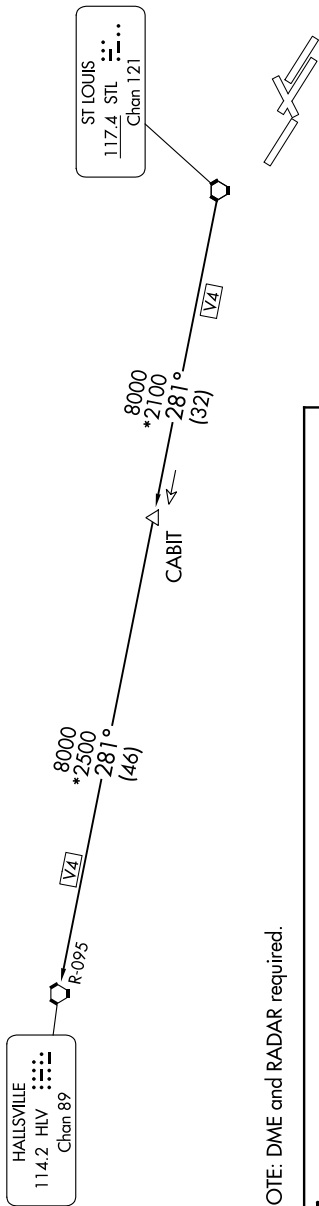

NOTE: DME and RADAR required.

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vector to appropriate route.

JETS: Maintain 5000 or assigned altitude, Thence. . . .

PROPS: Maintain 3000 or assigned altitude, Thence. . . .

. . . . (transition). Expect filed altitude 10 minutes after departure.

HALLSVILLE TRANSITION [OZARK8.HLV]: From over STL VORTAC on STL R-281 to CABIT, then on STL R-281 and HLV R-095 to HLV VORTAC.

TAKEOFF MINIMUMS
 Rwys 6, 12L/R, 24, 29: Standard.
 Rwy 11: 200-1 or standard with minimum climb of 370' per NM to 900.
 Rwy 30L: 200-1 or standard with minimum climb of 245' per NM to 800.
 Rwy 30R: 200-1 3/4 or standard with minimum climb of 230' per NM to 800.

NOTE: Chart not to scale.

NC-3, 22 FEB 2024 to 21 MAR 2024

OZARK EIGHT DEPARTURE

ST. LOUIS, MISSOURI

ST LOUIS LAMBERT INTL (STL)