

APP CRS	Rwy Idg	10553
123°	TDZE	540
	Apt Elev	618

RNAV (RNP) Z RWY 12R


ST LOUIS LAMBERT INTL (STL)

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized with Rwy 11 except for arrivals at RRIIP and HRBEE. Use of FD or AP required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5000 on track 123° to FONTI and hold, continue climb-in-hold to 5000.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CINC DEL	CPDLC
125.025	132.125 360.6	118.5 257.7	348.6 (Inbound)	119.5 363.1	
379.925			121.65 377.175 (Outbound)		
			118.925 227.125 (Rwy 11/29)		

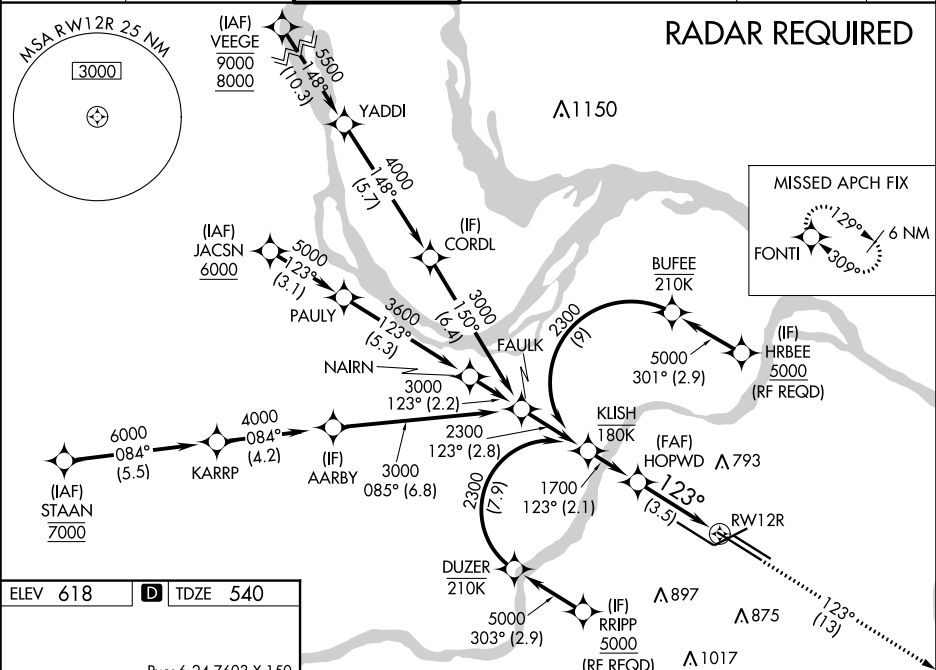

ELEV 618

TDZE 540

Rwy 6-24 7603 X 150

Rwy 11-29 9000 X 150

Rwy 12L-30R 9013 X 150

Rwy 12R-30L 11020 X 150

HIRL all Rwys

TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

HOPWD

1700

1700

123°

GP 3.00°

TCH 54

3.5 NM

5000

FONTI

tr 123°

RW12R

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	998/60 458 (400-1¼)			

AUTHORIZATION REQUIRED