

WAAS CH 86301 W17A	APP CRS 169°	Rwy Idg 5898 TDZE 1665 Apt Elev 1670
--	------------------------	---

RNAV (GPS) RWY 17


YORK MUNI (JYR)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV and LNAV/VNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
Climb to 4000 direct
WIVFO and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

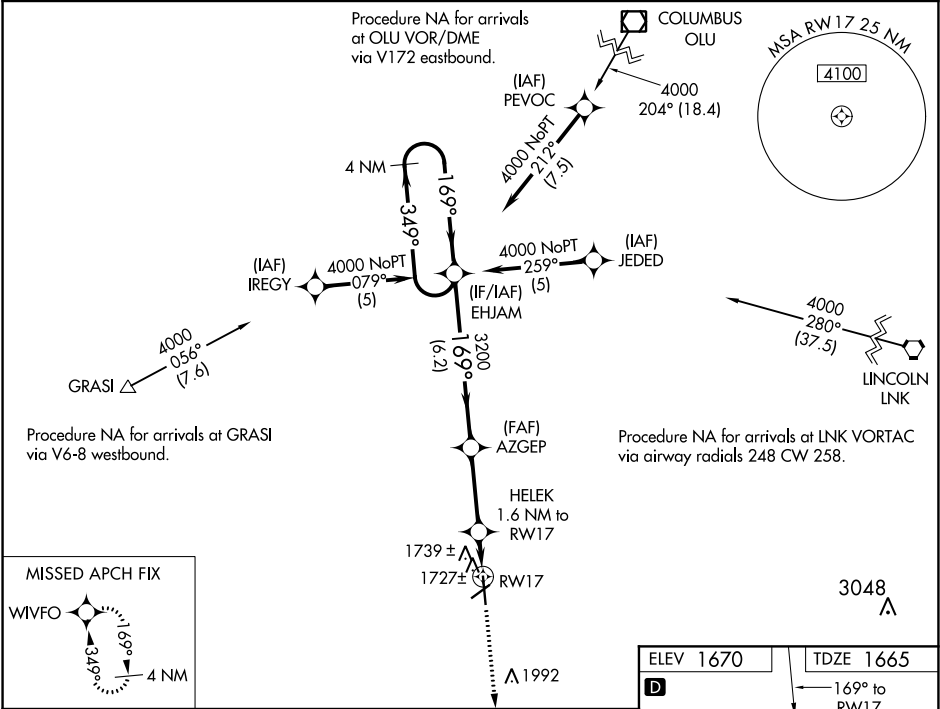

4 NM Holding Pattern		EHVJAM	AZGEP	HELEK 1.6 NM to RW17	4000	WIVFO
GP 3.00° TCH 44		349°	169°	169°	3200	
		6.2 NM	3 NM	0.7 NM	0.9 NM	
CATEGORY	A	B	C	D		
LPV DA	1915-¾		250 (300-¾)	NA		
LNAV/VNAV DA	2031-1¼		366 (400-1¼)	NA		
LNAV MDA	2000-1		335 (400-1)	NA		
CIRCLING	2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA		

